



Choice Tray Cart

TDC10, TDC12, TDC16, TDC20, TDC24, TDCPT10, TDCPT12, TDCPT16, TDCPT20, TDCPT24

Standard Features

- All stainless steel construction with choice of laminate exterior panels
- 6" casters, 2 with brakes
- 14" x 18", 15" x 20" trays & room service trays, 2 trays per slide
- Pull-type door with magnets & transport latch
- Small footprint

Warranty

Two years parts and one year labor

Options

- □ Push handle (non-pass thru only)
- Corner bumpers
- □ Wrap around bumpers
- □ Drains for easy cleaning capabilities
- □ Top rails (for 16 capcity size and under)
- □ Tow hitch package available

APPLICATION

The Alluserv tray delivery cart is designed for transportation of patient meals to decentralized locations. The all stainless construction cart features fixed tray sides with 5-1/4" tray spacing that accommodates two each 14"x18", 15"x20" or room service trays per side.

SPECIFICATIONS

The Alluserv tray cart has a 1" thick 18-gauge stainless steel tubular frame with welded, 18-gauge, pre-formed side panels/tray slides. Top, bottom and single panel door are 18-gauge stainless steel. Door has recessed door pull with a top mounted heavy-duty drop door latch. The door has a 270° swing.

Casters are 6" in diameter, with 2 fixed and 2 swivel with brakes, and are 2" rounded with soft tread to ensure a smooth and quiet ride for carpet or tile.


ALLUSERV,LLC

4900 West Electric Avenue | West Milwaukee WI | 53219 888-892-2213 | fax 636-239-8435 | info@alluserv.com | www.alluserv.com Spec #

Choice Tray Cart

Models

TDC10, TDC12, TDC16, TDC20, TDC24, TDCPT10, TDCPT12, TDCPT16, TDCPT20, TDCPT24

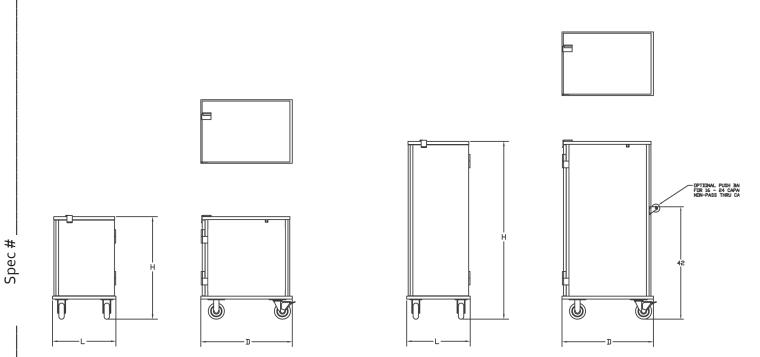

MODEL INFORMATION

MODEL	SHIP WEIGHT	PASS THRU MODEL	OVERALL SIZE			TRAY CAPACITY
			D	L	н	
TDC10	215 lbs.	TDCPT10	34-7/32"	23-3/4"	37-1/8"	10
TDC12	235 lbs.	TDCPT12	34-7/32"	23-3/4"	42-3/4"	12
TDC16	275 lbs.	TDCPT16	34-1/4"	23-3/4"	54"	16
TDC20	295 lbs.	TDCPT20	34-1/4"	23-3/4"	65-1/4"	20
TDC24	315 lbs.	TDCPT24	34-1/4"	23-3/4"	76-1/2"	24



4900 West Electric Avenue | West Milwaukee WI | 53219 | 888-892-2213 | fax 636-239-8435 | info@alluserv.com | www.alluserv.com

Alluserv reserves the right to to modify specifications or discontinue models without proir notification.