

# Drying Racks

## Models

**Domes: 60CDR, 100CDR**

**Induction Bases: 108 CDR, 180**

**CDR**

### Standard Features


- All stainless steel construction
- Casters- The unit maneuvers easily on four 5" diameter swivel casters with non-marking cushion tread, two with brakes to secure unit's position when necessary.

### Warranty

- Two years parts and one year labor

### Options

- ☐ Capability to hold 60-100 domes
- ☐ Capability to hold 108-180 domes
- ☐ Stainless Steel



Dome Cradle

## APPLICATION

The Alluserv Drying Rack can support any tray line layout. These drying racks are designed to provide a convenient and organized method of drying and storing domes and induction bases, as well as those induction bases for meal assembly. Depending on your bed count requirements, we offer the drying rack with capacities of 60 and 100 for the domes and 108 and 180 for induction bases. Cradles are removable and can run through dish washing machines.

## SPECIFICATIONS

The rigid frame is constructed of 1" O.D. square 18-gauge stainless steel tubular uprights and 14-gauge stainless steel "L" shape supports. The all-welded construction makes this drying rack strong, durable and reliable. The unit maneuvers easily on four 5" diameter swivel casters with non-marking cushion tread, two with brakes to secure unit's position when necessary.

### ALLUSERV, LLC

4900 West Electric Avenue | West Milwaukee WI | 53219

888-892-2213 | fax 636-239-8435 | [info@alluserv.com](mailto:info@alluserv.com) | [www.alluserv.com](http://www.alluserv.com)

# Drying Racks


## Models

Domes:60CDR, 100CDR

Induction Base: 108CDR, 180CDR

Spec #

AIA #

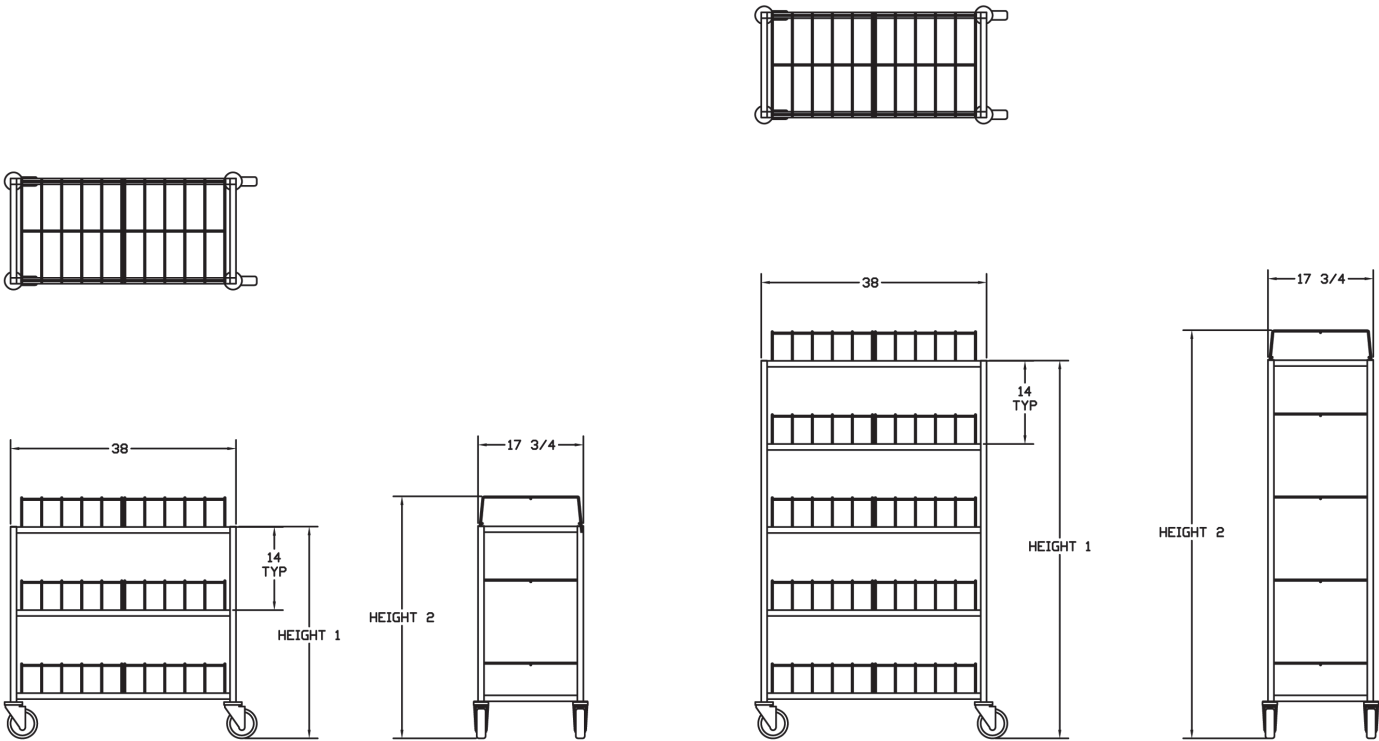

## MODEL INFORMATION

MODEL	TRAY CAPACITY	OVERALL SIZE			SHIP WEIGHT
		D	L	H	
60CDR	60	20-1/4"	39-1/4"	35-5/8"	81 lbs.
100CDR	100	20-1/4"	39-1/4"	68-5/8"	117 lbs.
108CDR	108	20-1/4"	39-1/4"	35-5/8"	90 lbs.
180CDR	180	20-1/4"	39-1/4"	68-5/8"	125 lbs.

