

Solid Top Counter

Models

AST2, AST3, AST4, AST5, AST6

Standard Features

- Solid stainless steel counter top has square turndown on all sides with fully welded, ground and polished corners
- Coved corners in liner of interior storage compartment liner facilitate cleaning
- Removable top panels allow for easy service access
- Rolls easily on 5" swivel casters mounted to two stainless steel channels for extra ridgity

Warranty

Two years parts and one year labor



Options

- Drop down work shelf
- □ Hinged door
- □ Door locks
- □ Flush mounted duplex outlet
- Pedestal mounted duplex
- □ Stainless steel legs in lieu of casters
- □ Beverage line cut outs

APPLICATION

The Evolution Series counters can support any tray line layout and are versatile enough to use in any format.

SPECIFICATIONS


The Solid Top Counter is constructed with heavy-duty gauge stainless steel and is equipped with stainless steel counter tops. Tops have square turndown on all sides with fully welded, ground and polished corners. Interior compartment has a stainless steel under shelf. Liner of interior of storage compartment liner has coved corners. The front panels will be easily removable and replaceable, allowing front service access. The body will be reinforced with vertical galvanized steel channel supports. Casters are 5" all-swivel with brake, mounted to stailess steel dolly channels.

ALLUSERV,LLC

4900 West Electric Avenue | West Milwaukee WI | 53219 888-892-2213 | fax 636-239-8435 | info@alluserv.com | www.alluserv.com Alluserv reserves the right to to modify specifications or discontinue models without proir notification. Spec #

Solid Top Counter

Models AST2, AST3, AST4, AST5, AST6

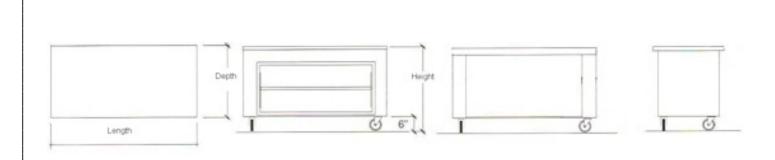

MODEL INFORMATION

MODEL	OVERALL SIZE			SHIP WEIGHT
	D	L	Н	
AST2	32-1/2"	38"	36"	400 lbs.
AST3	32-1/2"	52″	36″	450 lbs.
AST4	32-1/2"	66"	36″	580 lbs.
AST5	32-1/2"	80"	36″	600 lbs.
AST6	32-1/2"	94"	36"	750 lbs.



Spec # _



Elevating Meal Service Experiences

4900 West Electric Avenue | West Milwaukee WI | 53219 | 888-892-2213 | fax 636-239-8435 | info@alluserv.com | www.alluserv.com

Literature# 1024 08/20

Alluserv reserves the right to to modify specifications or discontinue models without proir notification.