



Cantilever Conveyor

Models

CRC4, CRC5, CRC6, CRC7, CRC8, CRC10

Options

- Electric Raceways- All units can be equipped with electric raceways for your electrical convenience
- Outlets- Allows you to plug in all support equipment. No more drop cords. Single or three phase outlets are available in either straight blade or twist lock
- Field Joint- Allows longer conveyors to be shipped and maneuvered to location in smaller sections.
- Removeable Sections- Allows sections to be placed directly into dishwasher for easy cleaning.
- Cord & Plug- Conveyors are constructed for hard wiring as standard, requiring electrical service at location. Ground receptacle required for this option. This option is available on any unit with electric amp load of 100 or less.

Standard Features

- All Stainless Steel or aluminum Construction
- Adjustable height
- 3" diameter casters
- Stainless Steel Rollers

Warranty

- Two years parts and one year labor

APPLICATION

The straight-line cantilever conveyor is designed for tray make-up operations. The cantilever conveyor will help streamline tray assembly for any healthcare operation. This model unit is designed for easy cleaning and long life. Please consult factory with specific questions.

SPECIFICATIONS

The cantilever conveyor consists of a standard conveyor pan and standard roller assemblies. The cantilever conveyor uprights are made of 2" (4cm) diameter, durable, 16-gauge stainless steel tube. Two uprights are required for a conveyor up to 6' in length. Three uprights are required for conveyors over 6' long to ensure ample support. Uprights have 1 1/4" (3cm) 18-gauge stainless steel cross rails welded between for support and each upright has a 12-gauge stainless steel fully welded gusset for support. Pan Support consists of a 14-gauge stainless steel tube that slides over upright for adjustable conveyor height. Conveyor is adjustable for most ergonomic working heights. Casters are 3" (8cm) diameter swivel plate-type with brakes (2 of 4 or 3 of 6) to ensure the conveyor stays in place during operations.

ALLUSERV,LLC



4900 West Electric Avenue | West Milwaukee WI | 53219

888-892-2213 | fax 636-239-8435 | info@alluserv.com | www.alluserv.com

Cantilever Conveyor

Models

CRC04, CRC05, CRC06, CRC07, CRC08, CRC10

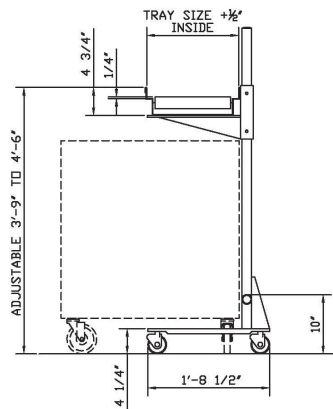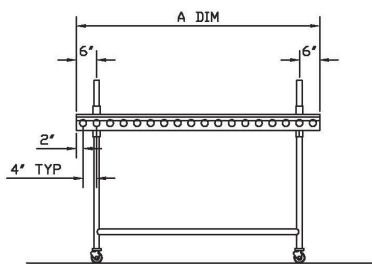

MODEL INFORMATION

MODEL	A DIM	SHIP WEIGHT	WIDTH
CRC04	4 ft.	90 lbs.	Tray size plus 1/2 inch
CRC05	5 ft.	110 lbs.	Tray size plus 1/2 inch
CRC06	6 ft.	130 lbs.	Tray size plus 1/2 inch
CRC07	7 ft.	150 lbs.	Tray size plus 1/2 inch
CRC08	8 ft.	170 lbs.	Tray size plus 1/2 inch
CRC10	10 ft.	190 lbs.	Tray size plus 1/2 inch

Spec #

AIA #



4900 West Electric Avenue | West Milwaukee WI | 53219 | 888-892-2213 | fax 636-239-8435 | info@alluserv.com | www.alluserv.com